

F305

Seat Belt Tension Loadcell Standard Ranges 16kN (1.6tonnef)

- ◆ Only 50g mass
- ◆ High performance
- ◆ All titanium construction
- ◆ Ultra light weight cable
- ◆ Connector for easy cable replacement
- ◆ Traceable calibration with certificate included in the standard price



The F305 is a high performance loadcell for measuring seat belt tension forces. Its geometry was created by computer program to generate an optimal design with minimal mass, material usage, stress and deflection. The outer bars can easily be removed allowing fitting to a seat belt while it is anchored at both ends.

The performance figures are typical values and are dependant on belt type. We can carry out a 5 point calibration using a 2 metre sample of customer supplied belt to reduce application errors. The calibration data can be used to reduce non-linearity errors in test results.

We are happy to design variants of this loadcell to meet your specific requirements. Please consult our engineering department.

Details of our other loadcell families can be found in the Product List and the Loadcell Specifier Guide. If you require copies please contact our sales department or look on our web site at www.novatechloadcells.co.uk.

Ordering Codes:	See the loadcell ordering code sheet for more details. Add range in the required units.		
F305TF00H0	Tension, unrationalised		

F305 Specification

Parameter	Value	Unit
Non-linearity - Terminal	±3	% RL
Hysteresis	±1	% RL
Creep - 20 minutes	±0.05	% AL
Repeatability	±0.2	% RL
Rated output - Nominal	1.5	mV/V
Zero load output	±4	% RL
Temperature effect on rated output per °C	±0.005	% AL
Temperature effect on zero load output per °C	±0.007	% RL
Temperature range - Compensated	-10 to +50	°C
Temperature range - Safe	-10 to +80	°C
Excitation voltage - Recommended	10	V
Excitation voltage - Maximum	10	V
Bridge resistance	350	Ω
Insulation resistance - Minimum at 50Vdc	500	MΩ
Structural stiffness (normal to belt axis)	1.9×10^7	N/m
Overload - Safe	30	% RL
Overload - Ultimate	100	% RL
Weight - Nominal (excluding cable)	50	g

The standard range is manufactured in titanium.

Notes


1. AL = Applied load.
2. RL = Rated load.
3. Temperature coefficients apply over the compensated range.

Connections

The loadcell is fitted with 2 metres of miniature PVC insulated 4 core screened cable. The cable is connected to the loadcell with a miniature 4 pin connector so that cable can be easily replaced if it is damaged.

Excitation + = Red Signal + = White Screen = Orange
 Excitation - = Black Signal - = Green

The screen is not connected to the loadcell body.

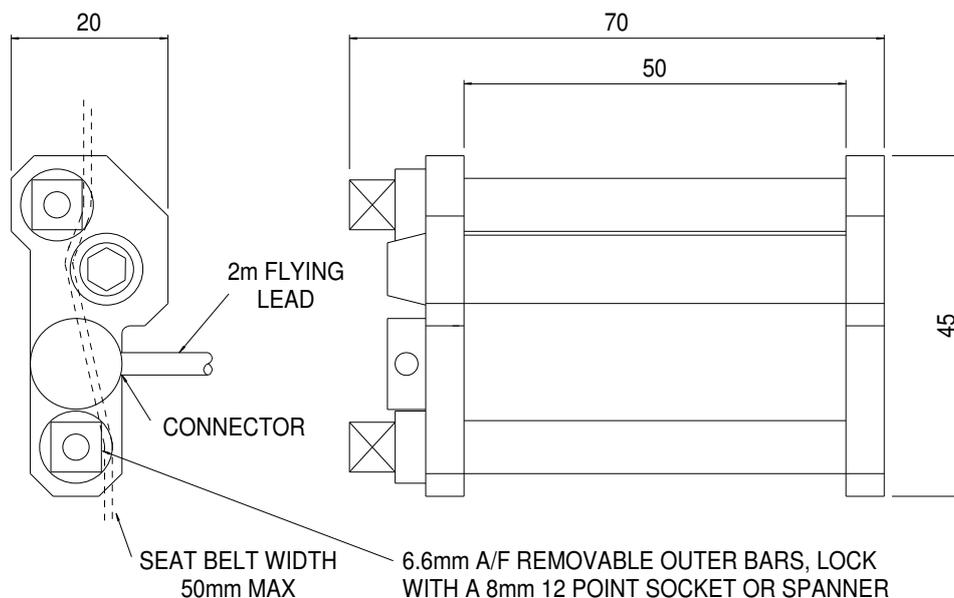

Novatech reserves the right to vary the foregoing details without prior notice

01/2012

NOVATECH MEASUREMENTS LTD

*** Manufacturing loadcells since 1972 ***

83 CASTLEHAM ROAD, ST LEONARDS ON SEA, EAST SUSSEX, TN38 9NT, ENGLAND

Tel: 01424 852744

email: info@novatechloadcells.co.uk

Fax: 01424 853002

www.novatechloadcells.co.uk