


## F312 Custom Shear Pin Loadcell

### Custom Ranges

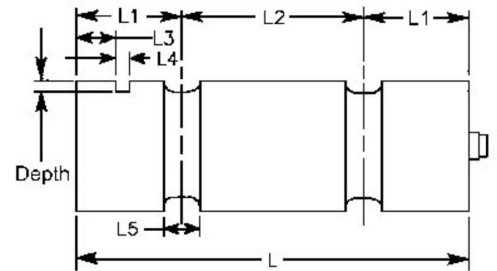

### Specification

Parameter	Value	Unit
Load range	-	tonnef
Non-linearity - Terminal	$\pm 0.1$ to $\pm 0.3$	% RL
Repeatability	$\pm 0.1$	% RL
Rated output - Nominal	2.2	mV/V
Zero load output	$\pm 4$	% RL
Temperature effect on rated output per $^{\circ}\text{C}$	$\pm 0.005$	% AL
Temperature effect on zero load output per $^{\circ}\text{C}$	$\pm 0.005$	% RL
Temperature range - Compensated	-10 to +50	$^{\circ}\text{C}$
Temperature range - Safe	-10 to +80	$^{\circ}\text{C}$
Excitation voltage - Recommended	10	V
Bridge resistance	350	$\hat{\Omega}$
Insulation resistance - Minimum at 50Vdc	500	M $\hat{\Omega}$
Overload - Safe	50	% RL
Overload - Ultimate	100	% RL
Sealing	IP65	
Cable length	2	m

## We can manufacture shear pin loadcells to your specific requirements.

If you contact us using the "Make an enquiry" button and send it to our sales department we will respond with a quotation, usually within 24 hours. We need at least one contact number or email address to return the quotation! More information can be found in the F312 Engineering Application Sheet.

### Notes

- AL = Applied load.
- RL = Rated load.
- Temperature coefficients apply over the compensated range.

### **Novatech Measurements Limited**

83 Castleham Road, St Leonards on Sea, East Sussex, TN38 9NT, England.

**Telephone:** +44 (0)1424 852744

**Fax:** +44 (0)1424 853002

**E-mail:** [info@novatechloadcells.co.uk](mailto:info@novatechloadcells.co.uk)